
PEXSuperstore

Brochure



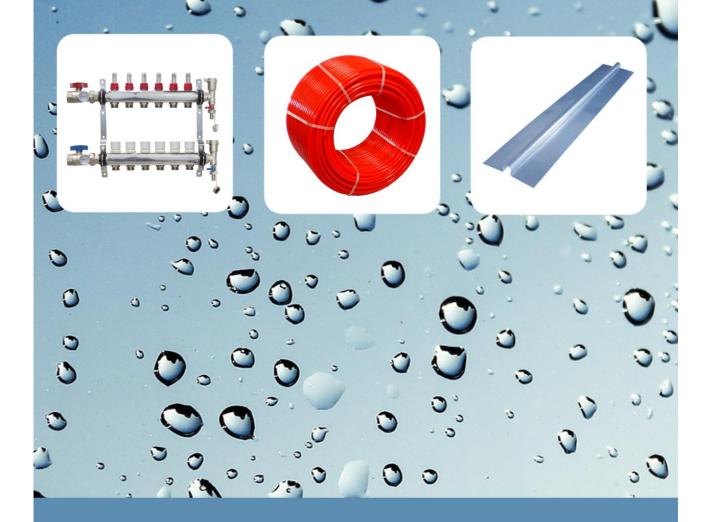

Radiant Floor Heating Systems

Premium radiant heating and potable water products, designed to provide comfortable and cost-efficient living.

Radiant PEX Tubing -



- NSF certified for radiant heating
- -CSA 137.5 Certified
- -Warnock Hersey Canada Certified
- Pressure ratings:

 - -79psi@200°F -100psi@180°F
 - -160psi@73°F Rated by PPI
- Comes with a 25 year manufacturer warranty

Size	Lengths Available
3/8"	500ft , 1000ft
1/2"	300ft, 500ft, 600ft, 1000ft (With PEX Cutter Optional)
5/8"	500ft , 1000ft
3/4"	300ft , 500ft
1"	100ft, 150ft, 300ft

Radiant Manifolds



- -Made of premium quality stainless steel
- -Auto air vents on both supply and return side
- -1 pc manifold balance section with flow meters
- -1 pc manifold isolation section with valves
- 2 pcs stem thermometer on each manifold isolation ball valve
- *Available from 2 loops to 12 loops available. 1/2" compression manifold adaptors are included. Variety sizes of compression manifold adaptors are available



- -Solid high quality nickle plated design
- -Main body is made of brass
- -2 pcs isolation manifold with 1/4" ball valve turn (supply-red handle)
- -3/4" Pipe thread on inlet and outlet



*1/2" compression manifold adaptors and end caps <u>are</u> included with purchase. Brackets are <u>not</u> included. Compression fittings can only be used with 1/2" PEX A, B, C or 1/2" PEX-AL-PEX.

-Thermostatic Actuator -



- -24 Volts Made in Italy
- -Specially made to fit PEX GUY Stainless Steel Radiant Manifold

Available with the option of 2 wired or 4 wired

Pressure Test Gauge

- -3/4" Female NPT on hex body
- Available PSI of 15, 30, 60, 100, 160, and 200
- Internals are made of brass
- *Optional choice of a pressure test kit which includes 1 nipple, 1brushing, and



Potable PEX Tubing




- *Comes with a 25 year manufacturer warranty
- -Potable tubing can act as a supply line for drinking water
- -NSF certified for potable water applications
- -CSA 137.5 Certified
- -Warnock Hersey Canada Certified
- -Pressure ratings: -79psi@200°F
 - -100psi@180°F
 - -160psi@73°F Rated By PPI

Size	Lengths Available	
1/2"	100ft, 300ft, 10000ft	
3/4"	100ft , 300ft , 500ft	
1"	150ft, 300ft	

Combo Packages (Blue and Red) are available

Copper Manifolds -



- *Available from female to male, and PEX to spun closed
- *Many ports are available, from 2 port to 18 port
- -Branch type: 1/2" PEX ball valve barb
- -Measurement between ports is 2" on center
- -Lead free / no lead copper body
- -For use with Radiant and Potable
- -Made in the USA

- -Sioux Chief 1/2" PEX plumbing manifold
- -Measurement between ports is 2" on center
- -Lead free / no lead copper
- -For use with Radiant and Potable application
- -Made in the USA



- *Available from male sweat to spun closed, PEX to PEX, and PEX to spun closed
- *Sizes are available from 3 port to 12 port



Heat Transfer Plate————

Bend Support————Snap-In-Clip———



- -High quality aluminum plates for 1/2" PEX tubing -Made in USA
- *Omega heat plates are
- available *Available in 2 feet and 4 feet lengths



PEX Female

Sweat

- -Use to make a 90 degree turns while installing PEX tubing
- Bend supports are available in plastic or steel



- High quality plastic Install in alternating direction to ensure secure piping
- *Available in 1/2",3/4", and 1"

Talon Clip -

not damaged if nails are

For use with any CTS pipe

(copper, PEX, CPVC, PB)

overdriven



- -High quality plastic and nail -Manufactured to ASTM standard F2098 -Preloaded nails and tube is
 - Compatible with any brand of PEX manufactured to North American standard
 - -Must use cinch/pinch tool
 - -Made from the finest material of stainless steel

*Available in 1/2", 3/4", and 1" *Available in 1/2", 3/4", and 1"

- Cinch Ring-Brass Ball Valve ----



- Made of brass and is NSF certified
- Compatible with any brand of PEX manufactured to North American standard
- -200 PSI max
- -200°F (93°C) max

*Available in 1/2", 3/4", and 1"



– Ball Valve Stop ——

- -Lead free PEX stop valve/ball valves -Made from chrome plated brass
- -Compatible with all brands of PEX tubing manufactured To SDR-9 standards
- *From PEX to PEX, PEX to sweat, and PEX to female iron pipe, many sizes are also available, such as: 3/8" (outside diameter), 1/2" 5/8", 3/4", and 1". Straight and angles are optional.

Brass Fitting-**Lead Free** Made From High Quality LEAD FREE Brass Variety sizes are available PEX Tee PEX Coupling PEX Elbow PEX Male PEX Male NPT Threaded Sweat **PEX Female** NPT Threaded **Drop Ear Elbow**









• Peter Mangone, Inc.

Toll Free: 1-877-235-6352 Direct: 1-909-606-0988

www.pexsuperstore.com sales@pexsuperstore.com

We are proud to provide quality materials and name brand products for radiant heating systems and potable water solutions.

Our focus is providing exceptional prices on well-known brands while offering great customer service.





